


■ INCLUDED ITEMS

- BA-10
- AC adapter
- Silicone Belts

■ PARTS AND CONTROLS

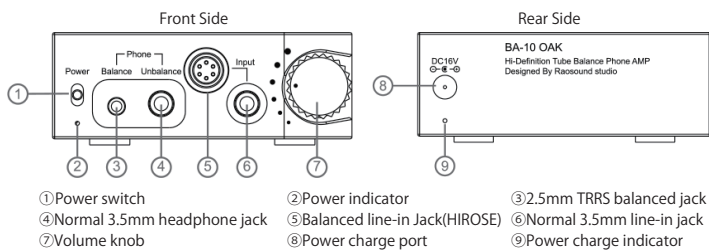

- ① Power switch
- ② Power indicator
- ③ 2.5mm TRRS balanced jack
- ④ Normal 3.5mm headphone jack
- ⑤ Balanced line-in Jack(HIROSE)
- ⑥ Normal 3.5mm line-in jack
- ⑦ Volume knob
- ⑧ Power charge port
- ⑨ Power charge indicator


■ CHARGING THE UNIT

- Turn off the unit.
(The battery charges while the unit is on.)
- Connect the 16v 1A~ AC adapter.
Charge indicator lights up in red.
Charging is completed in about 4 hours (The time is up to the AC adapter). The indicator turns off when the battery is completely charged.

■ CONNECT THE AUDIO DEVICE

Normal connection:
Connect the unit to the device by the Normal 3.5mm line-in jack on the front panel.
(The analog cable is an optional accessory.)

Balanced connection:
Connect the unit to the device by the Balanced line-in Jack(HIROSE) on the front panel.
(The unit is using the special HIROSE 6pins mini XLR type jack for the balanced mode. And the HIROSE cable is an optional accessory.)



INTERCONNECT SIDE:

- RCH GND
- RCH+
- RCH-
- LCH GND
- LCH+
- LCH-

PLUG TYPE:
HIROSE HR10A-7P-6P

■ Listening to music with the headphones

Normal connection:
Connect the headphones to the unit by the Normal 3.5mm headphone jack on the front panel.

Balanced connection:
Connect the headphones to the unit by the 2.5 mm TRRS balanced jack (A&K type, from tip R-/R+ /L+ L-) on the front panel.

■ Specifications

- Supported impedance: 8~300Ω
- S/N ratio: 110dB
- Maximum output: 250mW+250mW (32Ω)
- THD+N: <0.05%
- Battery: built-in lithium polymer rechargeable battery, approx 7hr battery life
- Charging time: approx 4 hours
- Size and weight: W74 x H26 x D135mm, 350g

Oriolus Japan

www.en.oriolus.jp

Cyras Co., Ltd.

Zipcode: 110-0016
Address: 5F, Nichiei-intec Okachimachi No.2 BLDG,
3-42-5, Taito, Taito-District, Tokyo, Japan
Tel: +81368699631
EMAIL: info@oriolus.jp